

NT6

Compact 1/2" Condenser Microphone with Detachable Capsule (head)

RØDE
MICROPHONES




Features

- 1/2" condenser capsule with remote preamp
- Gold sputtered externally biased condenser
- Two position PAD - 0dB and -10dB
- Two position High Pass Filter - flat and 80Hz
- Convenient two-axis swivel mount
- 3m Kevlar® fibre reinforced cable
- UHeavy duty satin-nickel plated body
- Low noise and full frequency response
- Designed and manufactured in Australia
- Full 10 year warranty*


Specifications

Acoustic Principle	Pressure gradient	Directional Pattern	Cardioid
Frequency Range	40Hz ~ 20,000Hz (selectable HPF @ 80Hz/12dB/octave)	Sensitivity	-37dB \pm 2dB re 1V/Pa (16mV @ 94 dB SPL) @ 1kHz
Nominal Impedence	200 Ω	Equivalent Noise	19dBA SPL (A - weighted per IEC651)
Maximum Output	+6dBu (@ 1% THD into 1k Ω)	Dynamic Range	119dB (per IEC651)
Maximum SPL	135dB @ 1kHz, 1% THD into 1k Ω load 145dB with PAD enabled	Signal/Noise	75dB SPL (A - weighted per IEC651)
Output Connection	3 pin XLR, balanced output between Pin 2 (+), Pin 3 (-) and Pin 1 (ground)	Dimensions	Preamp: Length - 188.4mm Diameter - 20mm Capsule: Length - 88.5mm Diameter - 20mm
Power Req.	P48/24 Phantom Power	Shipping Weight	560g
Net Weight	386g		

Frequency Response

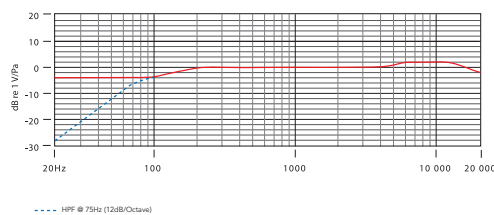

Polar Pattern



Included Accessories

- Swivel mount
- ZP1 zip pouch
- WS5 windshield



www.rodemic.com

*After online registration

Australia
107 Carnarvon st, Silverwater NSW 2128 Australia
Ph: +61 2 9648 5855 Fx: +61 2 9648 2455

USA
PO Box 4189 Santa Barbara CA 93140 USA
Ph: +1 805 566 7777 Fx: +1 805 566 0071